
Anwendung/Application :

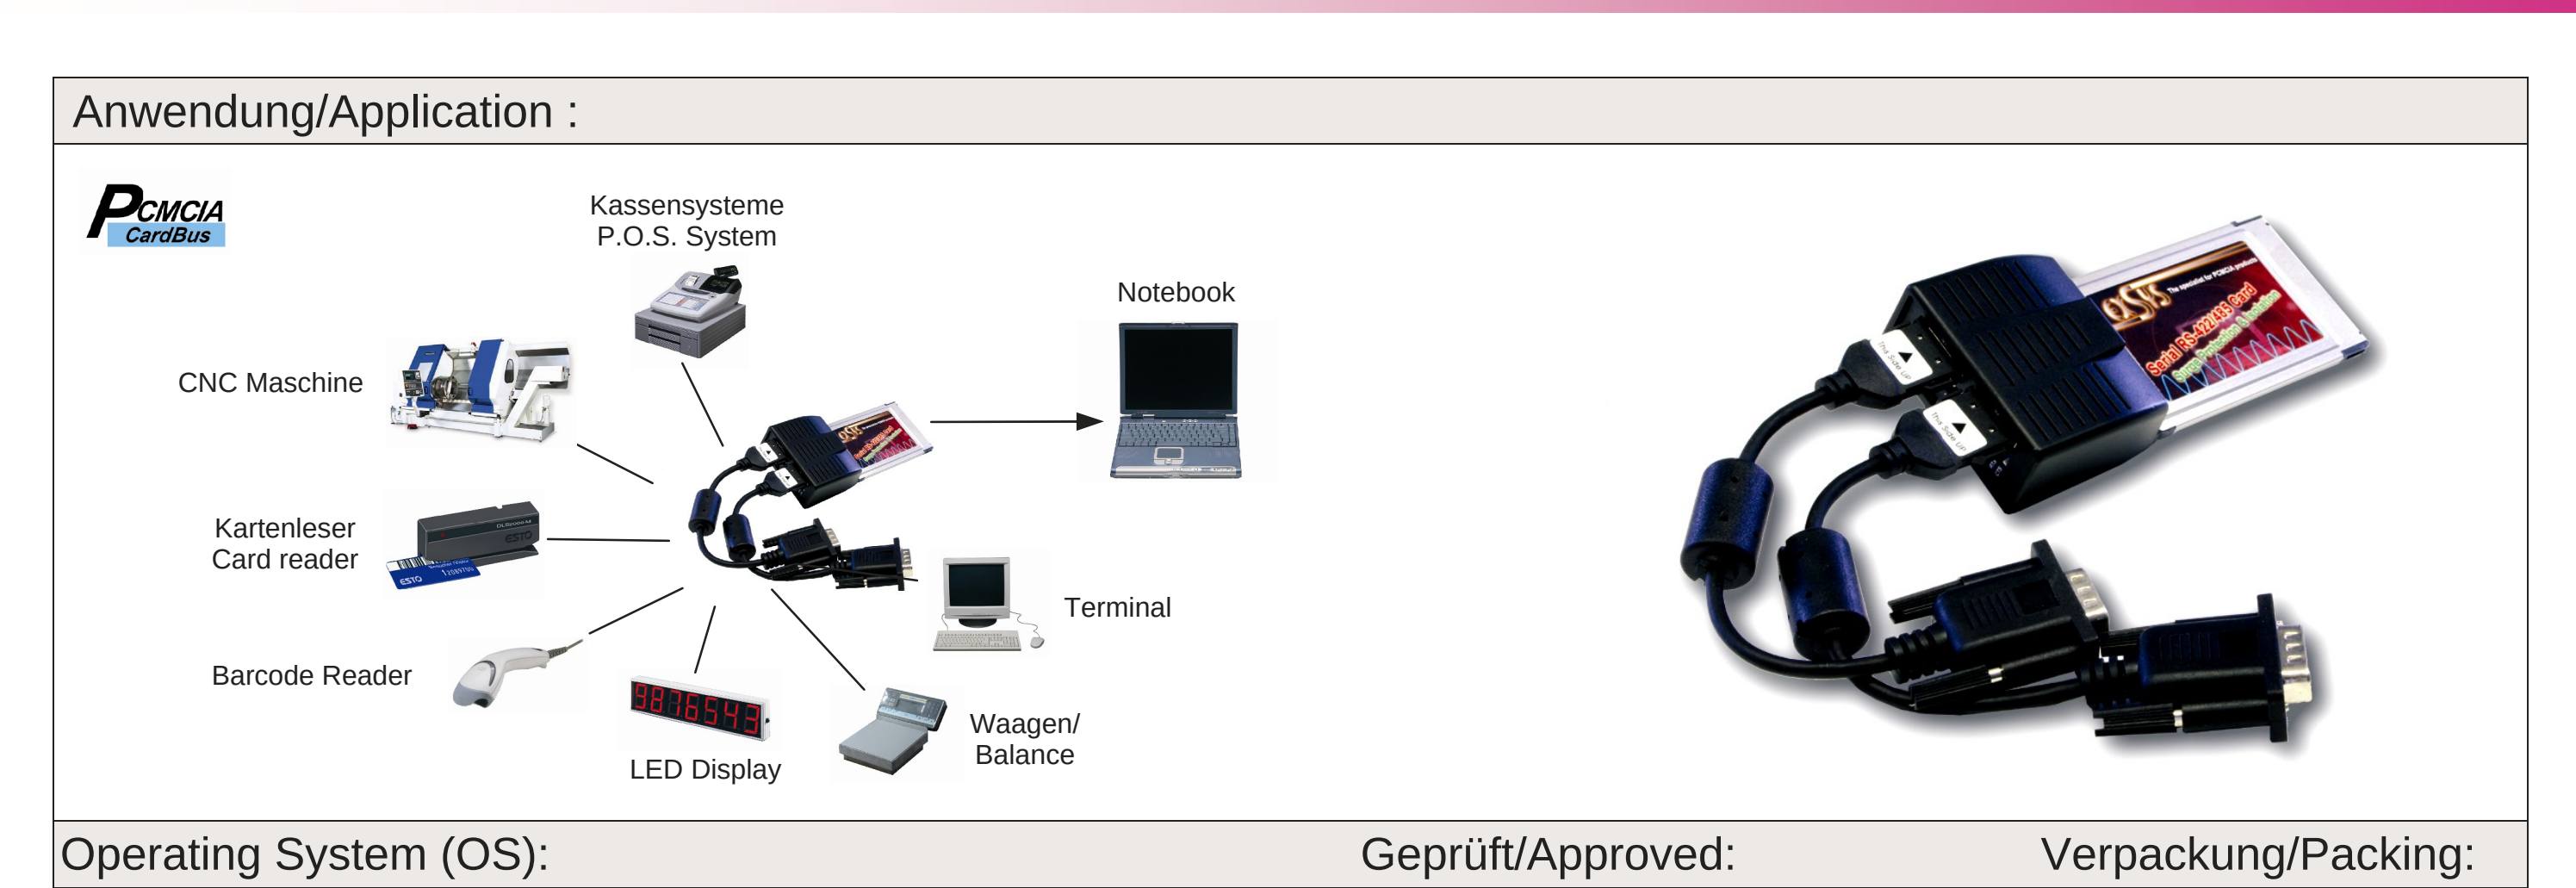


Operating System (OS): 98 SE, Me, 2000, xp, Server 2003, Windows Vista, Linux

Geprüft/Approved: CE, FC, RoHS, WHQL Certified Windows

Verpackung/Packing:

# PCMCIA 2S Seriell RS-422/485 Karte, 32-Bit

| | |
|---|---|
| Beschreibung : | • Die EX-1362 stellt zwei Serielle RS-422/485 High Performance UART 16C950 Ausgänge zur Verfügung. Er ist entwickelt worden um zwei weitere Serielle Ports für Notebook über den 32-Bit PCMCIA Bus zu erweitern, um Serielle RS-422/485 Peripheriegeräte wie z.B. , Kassendrucker, CNC Maschine, Terminal usw. anzuschließen. |
| Merkmale : | • Schnittstelle: RS-422/485 mit FIFO Buffer16C950 und 128Byte<br>• I/O Adressen: wird vom Betriebs System vergeben / Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing<br>• Daten Bits: 5, 6, 7, 8, 9 / Stop Bits: 1, 1.5, 2<br>• Parity: none, even, odd<br>• Terminierung 120Ohm kann ein- und ausgeschaltet werden<br>• Signale: Drei Einstellungen sind möglich<br>    • 4-Draht RS-422 (TXD+/-, RXD+/-) (Full Duplex)<br>    • 2-Draht RS-485 (Data+/-, Data +/-) (Half Duplex) |
| Chip-Set : | • Oxford OXCF950 |
| Datentransfer-Rate : | • 50Baud bis 921.6KBaud |
| Anschlüsse : | • 2 x 9 Pin D-SUB Seriell Stecker |
| Arbeitstemperatur :<br>Luftfeuchtigkeit : | • 0 bis 70°C<br>• 5 bis 90% |
| Hardwaresysteme : | • PCMCIA CardBus 32-Bit |
| Abmessung / Gewicht : | • 117 x 53mm / 250g |
| Lieferumfang : | • EX-1362, 2 x Kabel mit 9 Pin Stecker, Treiber CD, Handbuch |

# PCMCIA 2S Serial RS-422/485 card, 32-Bit

| | |
|---|---|
| Description: | • The EX-1362 provides 2 high performance 16C950-type UART compatible RS-422/485 serial ports. It is designed for Notebook to provide instant COM port expansion via the PCMCIA 32-Bit Bus to connect about serial RS-422/485 peripheral devices such P.O.S. System, CNC Machine, Terminal ect. |
| Feature : | • Interface: RS-422/485 with FIFO Buffer 16C950 and 128Byte<br>• I/O addresses: Setting from the operating system / Interrupt: Setting from the System BIOS with Interrupt Sharing<br>• Data Bits: 5, 6, 7, 8, 9 / Stop Bits: 1, 1.5, 2<br>• Parity: None, even, odd, space, mark<br>• Signal: Three modes are selectable:<br>    • 4-Wire RS-422 (TXD+/-, RxD+/-) (Full duplex)<br>    • 2-Wire RS-485 (Data+/-, Data+/-) (Halfduplex) |
| Chip-Set : | • Oxford OXCF950 |
| Data transfer rate : | • 50Baud up to 921.6KBaud |
| Connectors : | • 2 x 9 pin D-SUB serial male connector |
| Operating Temperature :<br>Operating Humidity : | • 0 to 70°C<br>• 5 to 90% |
| Hardware system : | • PCMCIA CardBus 32-Bit |
| Size / Weight : | • 117 x 53mm / 250g |
| Packaging contents : | • EX-1362, 2 x cable with 9 pin male connector, Driver CD, Manual |